

## SUBMITTAL INFORMATION





## GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY METER SWIVEL NUT OUTLET

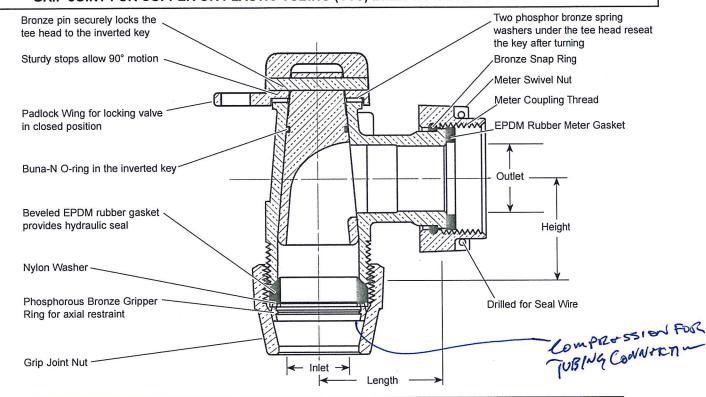

	VALVE SIZE	SERVICE LINE SIZE INLET	METER SIZE OUTLET	LENGTH	Неіднт	APPROX. Wt. Lbs	PART Number	✓ SUBMITTED ITEM(S)
_	3/4"	3/4"	5/8"	1-11/16"	1-5/8"	1.4	KV43-331W-G-NL	
	3/4"	3/4"	5/8"x3/4" & 3/4"	1-11/16"	1-5/8"	1.6	KV43-332W-G-NL	
_	3/4"	1"	5/8"	1-11/16"	2"	1.4	KV43-341W-G-NL	
2	3/4"	1"	5/8"x3/4" & 3/4"	1-11/16"	2"	1.7	KV43-342W-G-NL	
	1"	1"	1"	1-15/16"	1-9/16"	2.3	KV43-444W-G-NL	
7	1" Dbl. Locking	1"	1"	1-15/16"	1-9/16"	2.2	KV43-444WW-G-NL	
	1"	1-1/4"	1"	1-15/16"	1-7/8"	2.7	KV43-454W-G-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

## **FEATURES**

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- UL Classified to ANSI/NSF Standard 61 and Standard 61 Annex G (NSF/ANSI 372)
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Padlock Wing for locking the valve in a closed position. "WW" indicates Double Padlock Wings for locking valve in open or closed position
- Meets 100 PSI pressure requirement of AWWA Standard C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



## The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167 http://www.fordmeterbox.com

Su	bm	itted	Bv
Ou	DIII	ittou	

05/03/13